



FERROTEC CONFIDENTIAL

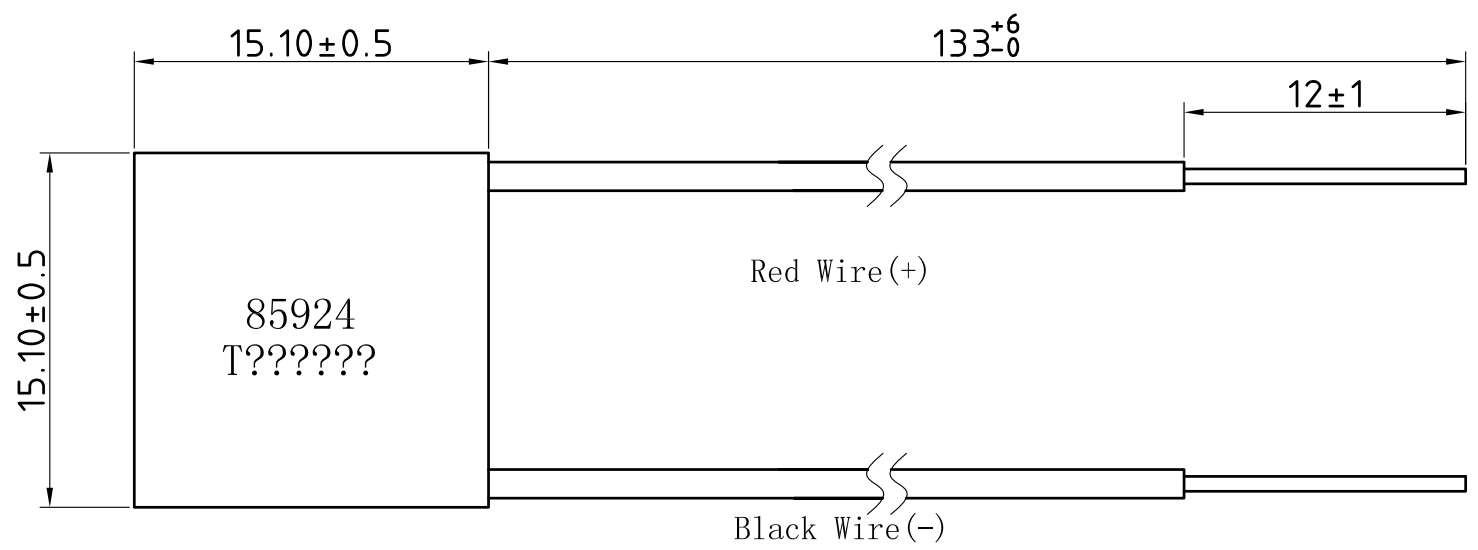

- 1) The resistance of the module shall be within 0.717 to 0.872 ohms at an ambient temperature of 25 degrees Celsius.
- 2) Material of lead wires: #24 AWG Type-E Teflon MIL-W-16878E/4. The end of the lead wires is pre-tinned.
- 3) Lot Number and Part Number shall be stamped on the cold side with black color.

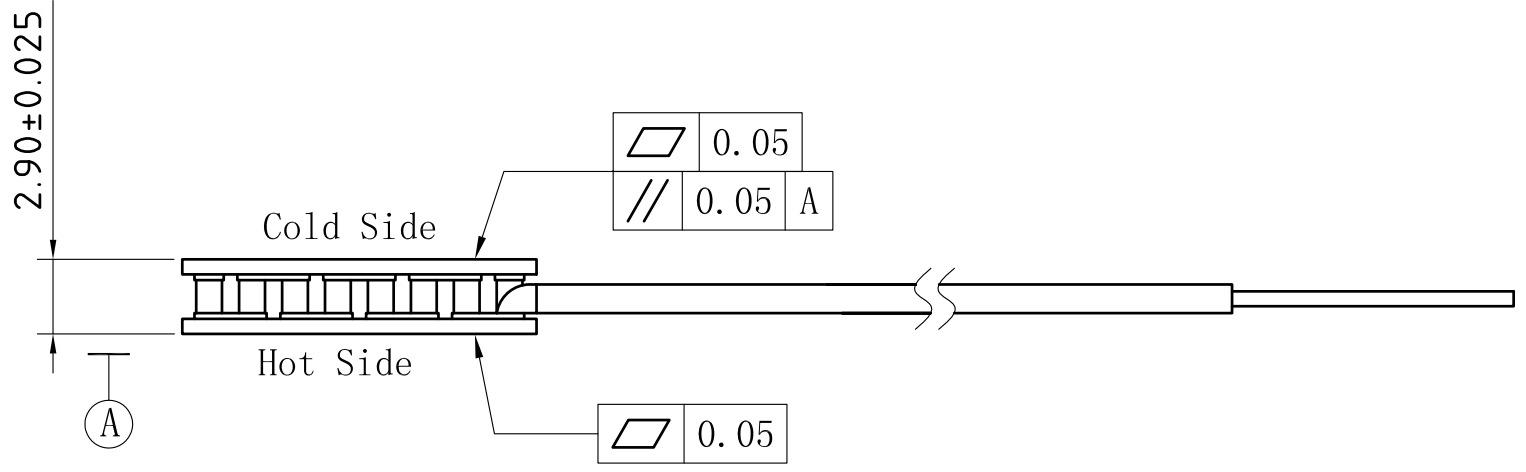

ROHS COMPLIANCE

Item	Value	Test Conditions
I <sub>max</sub>	4.0A	Q <sub>c</sub> =0, DT=DT <sub>max</sub> , Th=50°C
V <sub>max</sub>	4.4V	Q <sub>c</sub> =0, I=I <sub>max</sub> , Th=50°C
DT <sub>max</sub>	83°C	Q <sub>c</sub> =0, I=I <sub>max</sub> , Th=50°C
Q <sub>cmax</sub>	9.3W	I=I <sub>max</sub> , DT=0, Th=50°C
Th <sub>max</sub>	200°C	Momentary

**Ferrotec Corporation**  
 (Zhijiang Factory)  
 668# Binkang Road, Hangzhou Hi-tech  
 Garden, Zhejiang Province, P.R.China

General Dimension Tolerance			PLs	Date Modifying	Summary Of Modification	By	Designed	Finished Mark	Title	Proj.
Process	Cutting		Forging				Jiang	14.2.12	20013/031/040B	3 Angle
	Common	Special					Common	Checked		
Size Range	Common	Special	Common				Yongqin Wu	14.2.12	Drawing Number	1/1
less than 6	±0.1	±0.15	±0.5				Approved		T1303-1700	
6 up to 30	±0.2						FTH		P/N	Scale: Do Not Scale
30 up to 120	±0.3	±0.2	±0.7				Approved	Raw Material Size		
120 up to 315	±0.5	±0.25	±1.0				FT		85924	Rev. Z
315 up to 1000	±0.8	±0.4	±1.5				Approved	Raw Material Weight		
1000 up to 2000	±1.2	±0.6	±2.0				FTU			